

Rovalve

Ideal for applications in which content sampling of stock, slurry or other media is desired.

Features

- Operated by a simple spring loaded lever operator for quick, precise action.
- Cast 316 stainless steel body.
- Standard with a silicone resilient seat for drip tight shut-off.

General Application

- Pulp and paper

Technical Data


Range: Figure SAM-A115, 1 1/2" ID,
1 1/2" NPT mounting threads

Figure SAM-A120, 1 1/2" ID,
2" NPT mounting threads



Rovalve Figure SAM-A115/120

Cast Stainless Sampling Valve 1 1/2" NPT and 2" NPT

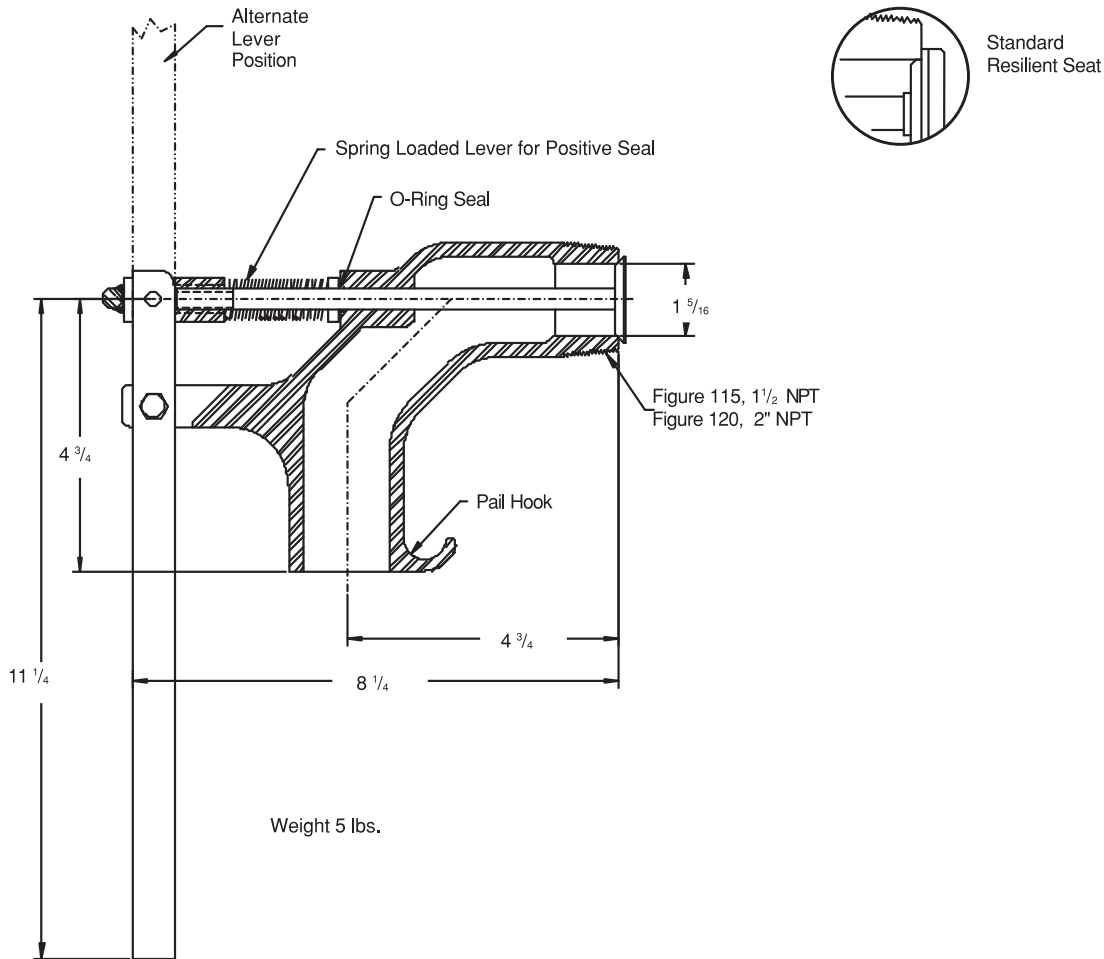

Materials

Body: Cast 316 SS

Disc/Rod: 316 SS

Seat: Resilient Silicone

O-Ring: Viton®

Lever: 304 SS

Tyco Flow Control (TFC) provides the information herein in good faith but makes no representation as to its comprehensiveness or accuracy. This data sheet is intended only as a guide to TFC products and services. Individuals using this data sheet must exercise their independent judgment in evaluating product selection and determining product appropriateness for their particular purpose and system requirements. TFC MAKES NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE INFORMATION SET FORTH HEREIN OR THE PRODUCT(S) TO WHICH THE INFORMATION REFERS. ACCORDINGLY, TFC WILL NOT BE RESPONSIBLE FOR DAMAGES (OF ANY KIND OR NATURE, INCLUDING INCIDENTAL, DIRECT, INDIRECT, OR CONSEQUENTIAL DAMAGES) RESULTING FROM THE USE OF OR RELIANCE UPON THIS INFORMATION. Patents and Patents Pending in the U.S. and foreign countries. Tyco reserves the right to change product designs and specifications without notice. All registered trademarks are the property of their respective owners. Printed in the USA.